


GT10 Installation

What's Included

Verify that your GT10 shipment contains the following parts:

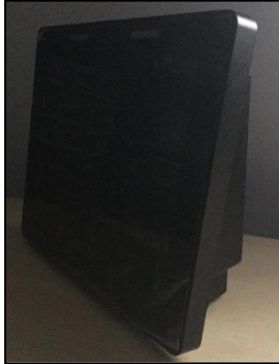

GT10



12V Ungrounded Power Adapter




Keys

Installing GT10


1. At the bottom of right side of the clock, insert the key and press the key in clockwise direction.
2. The front panel bottom can be pulled forward when the key is in the following location. Pull forward the front panel bottom, then lift front panel to separate it from the back panel.




3. Bring in any cables through snip-out apertures (labeled A or B in the following picture). If the clock must be mounted over a power outlet with PSU (wall wart) inside the case, snip-out the large aperture (labeled B in the following picture). Cables may be routed within the cabling cavity between the back panel and mounting surface (labeled C in the following picture)

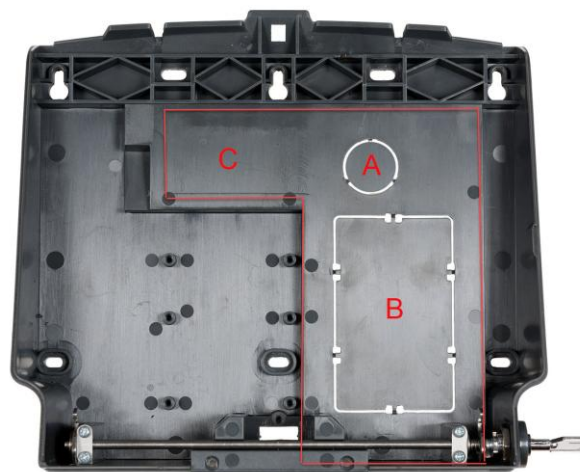

4. Fix the back panel to a flat vertical surface at a height that is comfortable for users to see and touch the screen. Use suitable screws through any of the following fixing points to firmly secure the back panel. **Note:** Do not over-tighten the screws or distort the case.

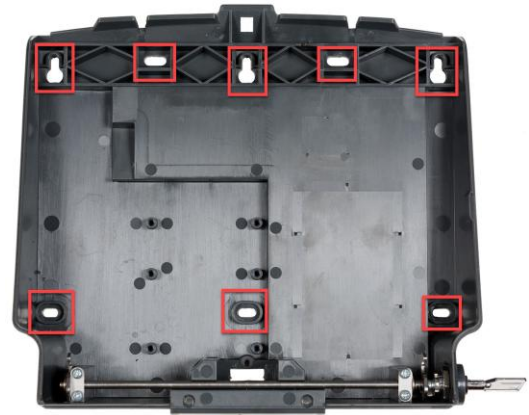

5. Plug-in the power cable on the front panel. For wired network connection, plug-in the Ethernet cable on the front panel.

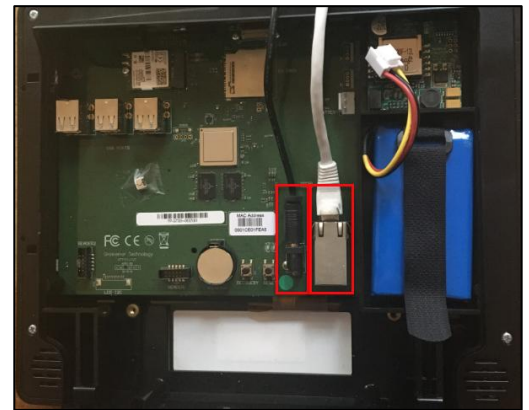

6. Place the top of the front panel onto the locating tabs at the top of the back panel.



7. Close the front panel toward the bottom of the back panel.



8. Press the key in counterclockwise direction, then remove the key. Plug the 12V power adapter into the outlet on the wall. **Note:** The key cannot be removed in the unlocked position.

